

SWIWIN SW400Pro-K



Technical specifications



SWIWIN SW400Pro-K List of engine accessories

Serial number	Name	Picture specification	Quantity
1	Engine body		one
2	ECU		one
3	GSU		one
4	Fixing frame		one
5	Power cord plug		one
6	Signal wire plug		one
7	Switch valve		one



8	Oil filtration		one
9	Tubing	 $\Phi 4 \times \Phi 2.5\text{mm}$ $\Phi 6 \times \Phi 4\text{mm}$	1.5m

Technical parameter

Model	SW400Pro-K
Thrust	40kg
Diameter (mm)	148mm
Length (mm)	341mm
Weight	3240g
ECU weight	436g
Usage temperature	-40°C~50°C
Supply voltage	4S Lipo battery
Starting system	One-button electronic start
Rpm Range	35000-97000
Exhaust Temperature	750°C
Fuel Consumption	1000g/min
Fuel	kerosene
Lube oil	3%~5%
Maintenance Interval	25H
Start time	≤30s

Engine start parameters

Pump Voltage	1.6V
RPM Start Up Ramp	80%
Pump Start Up Ramp	8
Glow Plug	5-7V
Valve	40
Ignition RPM	3000
Preheat RPM	8000
RPM Off Starter	23000

Engine operating parameters

RPM ACC	40
RPM DEC	40
Max RPM	97000
Idle RPM	35000
Minimum speed	23000
Max Temp	1000
Low Volt	10V
Restart	close
Restart Glow Plug	Consistent with the voltage of the burner
Pump Limit	13V
Idle Stable	8

Engine cooling parameters

Cool	4000rpm
------	---------

Starting motor parameters

Pop-up time	0.4S
-------------	------


Ejection voltage	4V
------------------	----

Run Voltage	5V
-------------	----

RPM Stable	20
------------	----

Note: All data are measured at standard air pressure.

System connection diagram

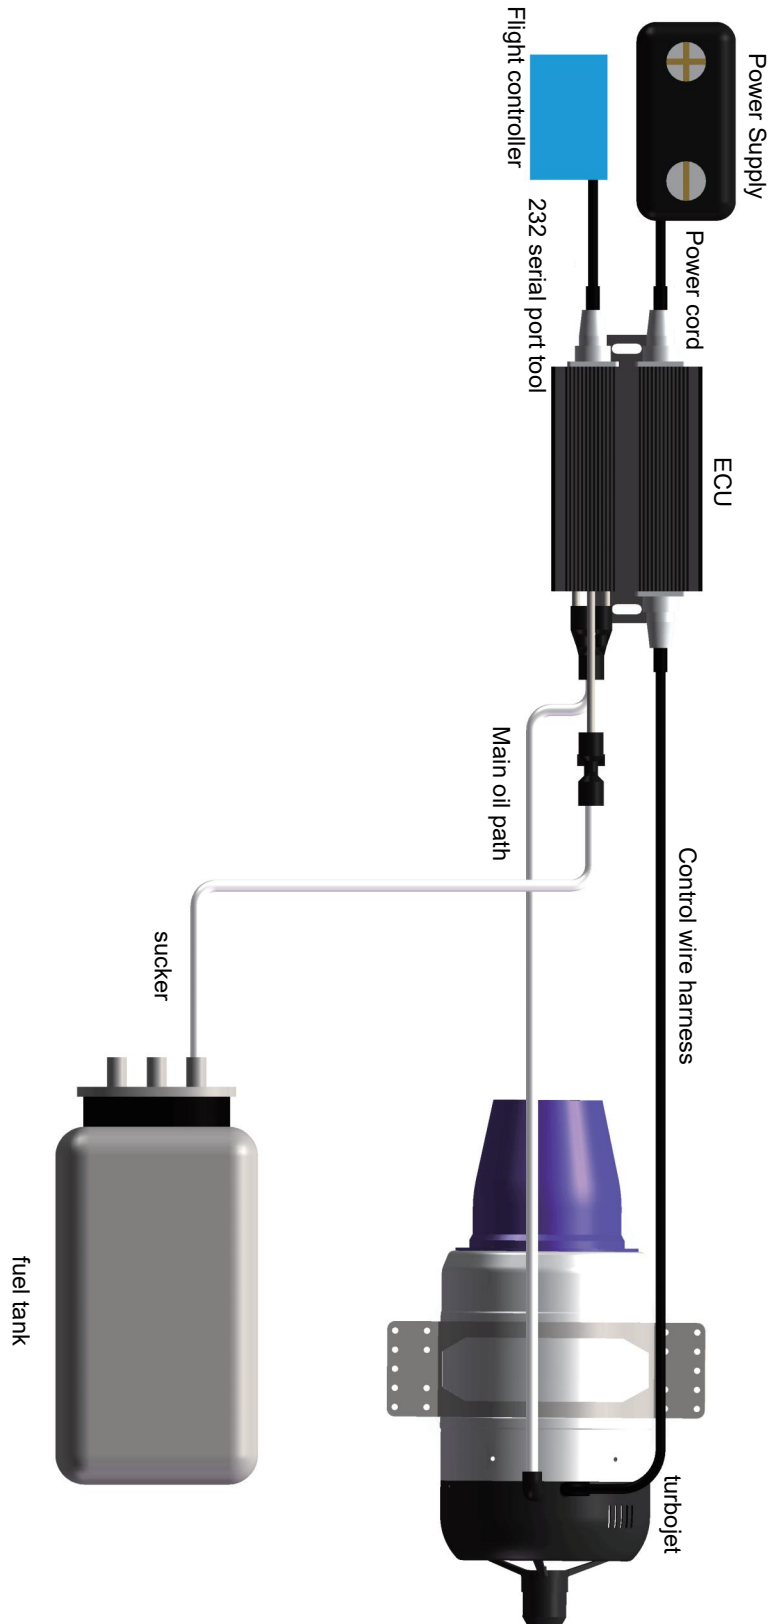

Product dimension diagram

