

SWIWIN SW300Pro



Technical specifications



SWIWIN SW300Pro List of engine accessories

Serial number	Name	Picture specification	Quantity
1	Engine body		one
2	ECU (V4)		one
3	GSU		one
4	Fixing frame		one
5	Power cord plug		one
6	Signal wire plug		one
7	Switch valve		one



8	Oil filtration		one
9	Tubing	 $\Phi 4 \times \Phi 2.5\text{mm}$ $\Phi 6 \times \Phi 4\text{mm}$	1.5m

Technical parameter

Model	SW300Pro
Thrust	30kg
Diameter (mm)	132mm
Length (mm)	333mm
Weight	2560g
ECU weight	353g
Usage temperature	-40℃~50℃
Supply voltage	4S Lipo battery
Starting system	One-button electronic start
Rpm Range	38000-98000
Exhaust Temperature	750℃
Fuel Consumption	820g/min
Fuel	kerosene
Lube oil	3%~5%
Maintenance Interval	25H

Engine start parameters

Pump Voltage	0.5-1.2V
RPM Start Up Ramp	100%
Pump Start Up Ramp	3
Glow Plug	5-7V
Valve	40
Ignition RPM	4000
Preheat RPM	4000
RPM Off Starter	16000

Engine operating parameters

RPM ACC	25
RPM DEC	25
Max RPM	98000
Idle RPM	38000
Minimum speed	20000
Max Temp	1000
Low Volt	10V
Restart	close
Restart Glow Plug	Consistent with the voltage of the burner
Pump Limit	10V
Idle Stable	8

Engine cooling parameters


Cool	5000rpm
------	---------

Starting motor parameters

Pop-up time	0.4S
Ejection voltage	4V
Run Voltage	5V
RPM Stable	20

Note: All data are measured at standard air pressure.

System connection diagram

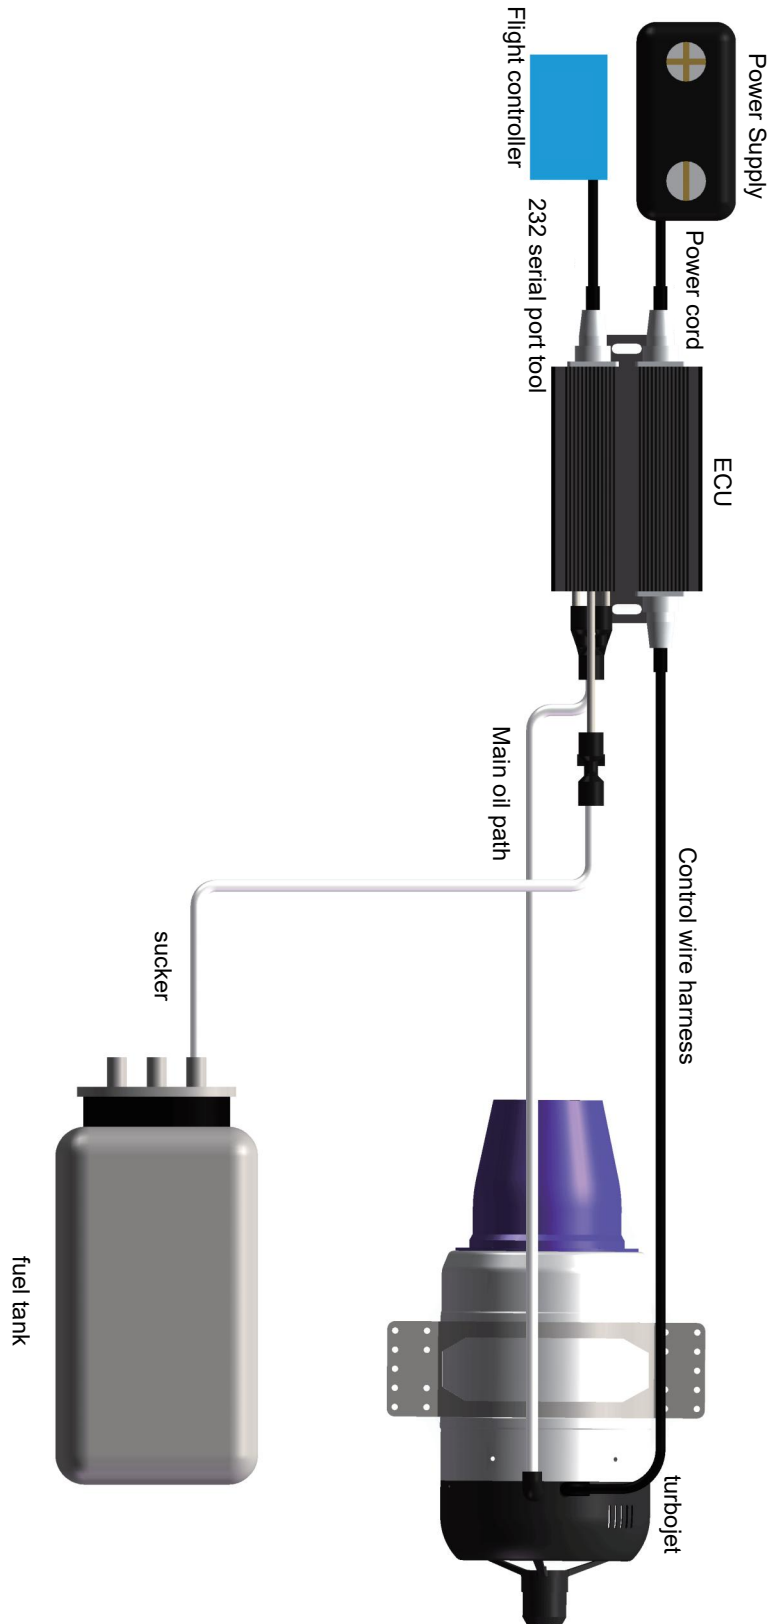



Product dimension diagram

